


RoHS
Compliant

BOM				
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
1	BODY	BRASS	2	NICKEL PLATED
2	CENTER PIN	BRASS	1	GOLD PLATED
3	CENTER PIN	Be.Copper	1	GOLD PLATED
4	DIELECTRIC	TEFLON	2	NONE
5	RADIATOR	ALUMINUM	1	BALCK
6	HOUSING	BRASS	1	GOLD PLATED
7	NUT	BRASS	2	NICKEL PLATED

ELECTRICAL

IMPEDANCE: 50 Ω
 FREQUENCY: DC 0-4 GHz
 VSWR: 1.25 @ DC-4 GHz
 PEAK POWER: 500W
 AVERAGIE POWER(WATTS): 5
 ATTENUATOR: 40dB ± 1dB

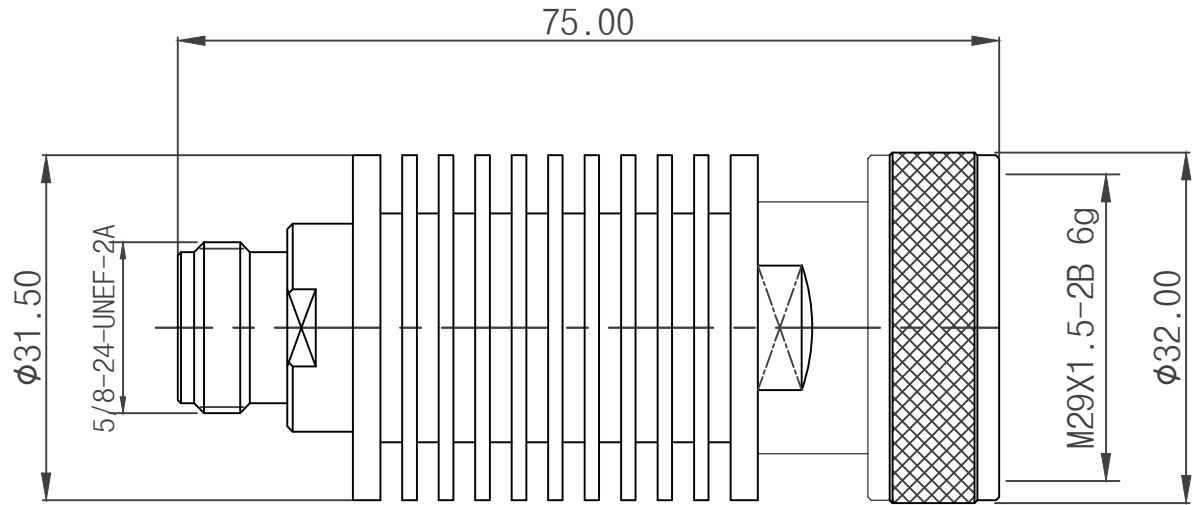

ITEM	Description	Date	Revision	Mender
REVISIONS				

REMARKS:	REV:	A1	TITLE:		
	DESIGNED:	Cary	7/16 MALE TO N FEMALE FIXED ATTENUATOR 5W 4GHz, 40dB		
	DRAWN:	Cary	ASSEMBLY DRAWING	SCALE:	FIT
	CHECKED:	XXXXX	DWG No: 821219-5W-4G-40dB	SHEET SIZE:	A4
	APPROVAL:	XXXXX	DATE: 2016/10/24	UNITS:	mm
TOLERANCES:		3RD ANGLE			
DIM. X.X=±0.5		SUPERCONN[®] TECHNOLOGY RF/Microwave Coaxial Connectors www.super-conn.com			
X.XX=±0.25					